


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25

- 技术要求:
- 打铜底0.5-1μm, 镍2-2.5μm, 哑锡3-5μm。
 - 不得有变形, 毛刺等现象。
 - 插脚尖部符合可焊性要求。
 - 螺纹需符合通止规/止针要求。
 - 螺纹扭矩: 1.8Nm。
 - 额定电流: 120A。
 - X为重点测量尺寸。

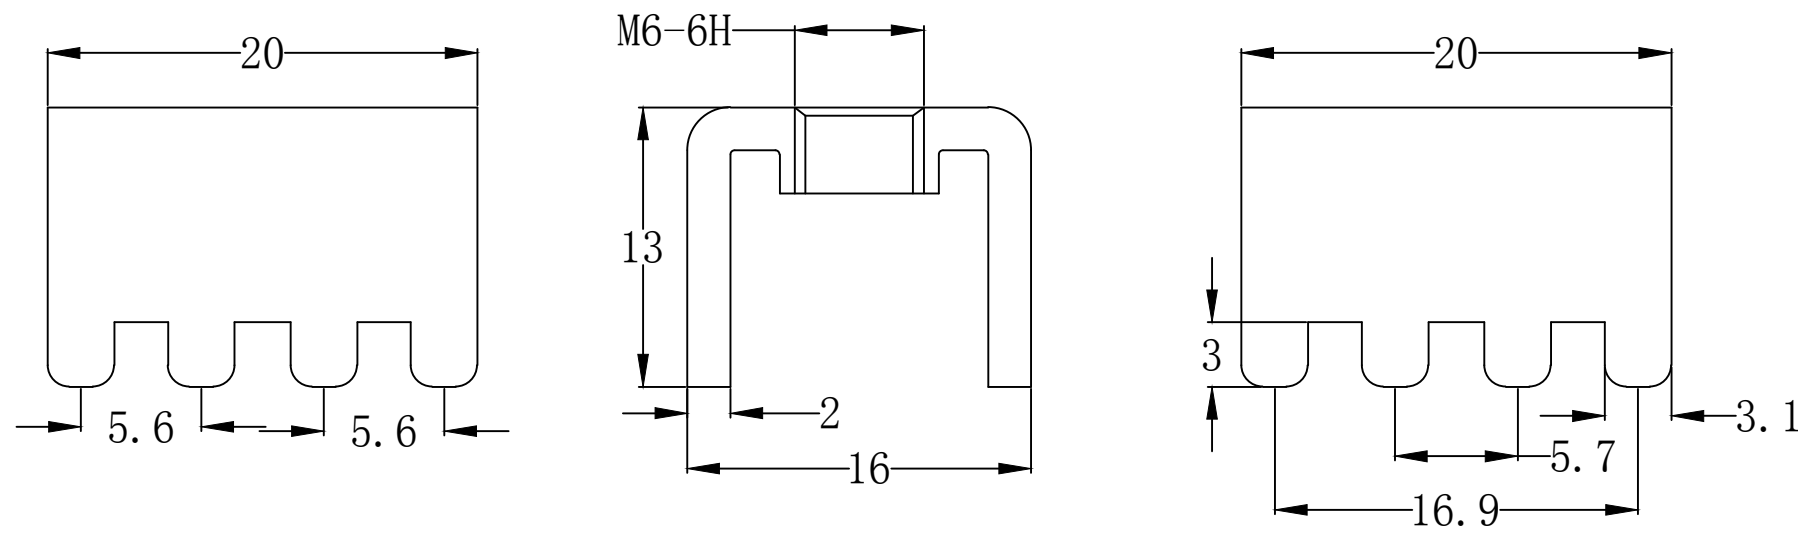

>30 ±0.40	x.°±	PART NO: T68160200-1300	XFCN 兴飞连接器													
6-30 ±0.30	.x°±					TITLE: PCB SOLDERING TERMINAL										
0-6 ±0.20	.xx°±								DWG NO: /							
ANGLES ±1°	.xxx°±											APPD				
UNITS:	mm														CHKD	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		VIEW														
1	插脚				T2(Y2)	1	SCALE									
序号	名称				零件编号	材质				数量	SHEET					
					DATE											
										2023.11.25						
														NONE		
								1:1								
													A1			