
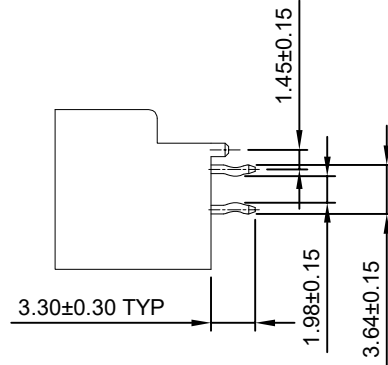


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

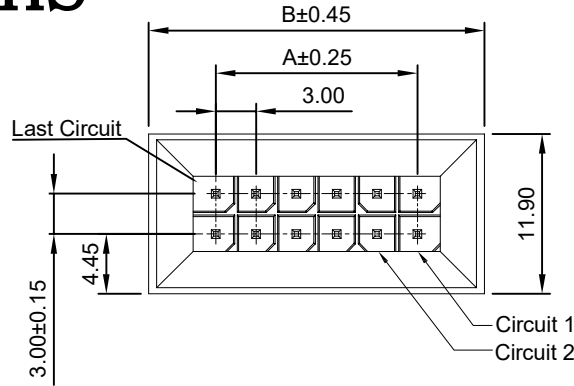

SPECIFICATIONS

1. Current rating: 5A
2. Temperature range: -25°C ~ +85°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 1000V AC/ minute.
5. Contact resistance: 20mΩ Max.



Material:

Insulator Material: PA9T UL94V-0 Black
 Contact Material: Brass
 Contact Plating: Contact Area Plating: Plated Tin or Plated GoldMate


Ordering Code:

M3045VS-2xNP
 1 2


1. 序列号
2. Pin位数: 2x02P
2x14P

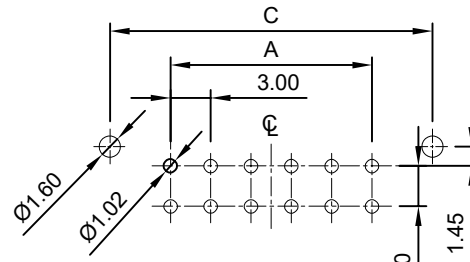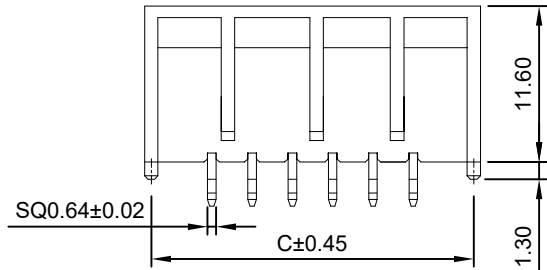

P.C.B LAYOUT: TOP VIEW
 TOLERANCE: ±0.05mm

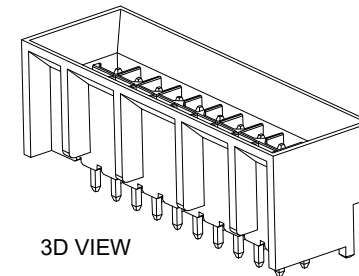

3D VIEW

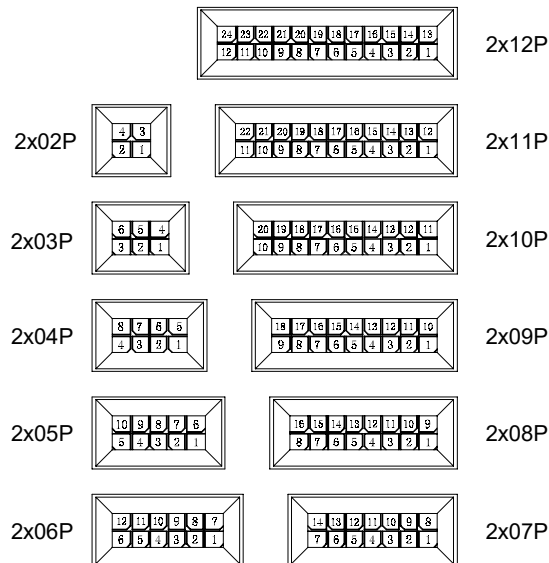

CIRCUIT SIZE LAYOUT

No. of PIN/ROW	Dimension		
	A	B	C
2x02	3.00	13.00	12.00
2x03	6.00	16.00	15.00
2x04	9.00	19.00	18.00
2x05	12.00	22.00	21.00
2x06	15.00	25.00	24.00
2x07	18.00	28.00	27.00
2x08	21.00	31.00	30.00
2x09	24.00	34.00	33.00
2x10	27.00	37.00	36.00
2x11	30.00	40.00	39.00
2x12	33.00	43.00	42.00

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

PART NO: M3045V-2xNP
 TITLE: 3.00mm Crimp Style Connectors

XFCN 兴飞连接器

0769-82001899
 www.xfconn.com

DWG NO:

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

APPD	Chen ZhiQiang	VIEW	
CHKD	Liu Wei	SCALE	SHEET REV
DRAW	Chen HongJiang	SCALE	SHEET REV
DATE	2024.06.24	NONE	1/1 A1