
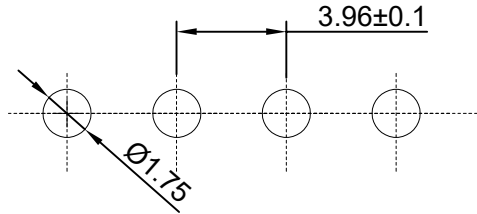


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.04.24

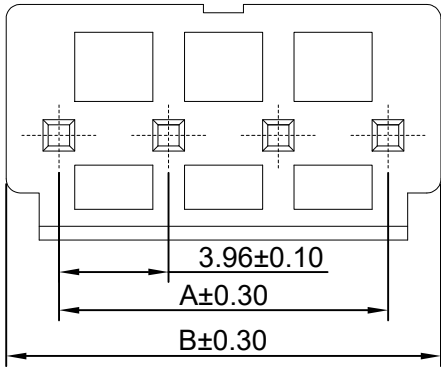

SPECIFICATIONS

- Current rating: 7A
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.



Material:

Insulator Material: PA66 UL94V-0 (2)
 Contact Material: Brass
 Contact Plating: Tin-Plated
 Mate with XFCN P3960 series Housing

Ordering Code:

M3960V-XX
 1 2

1. 序列号
2. Pin位数: 02-16P

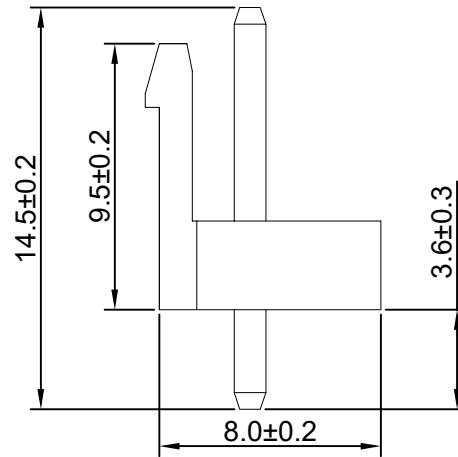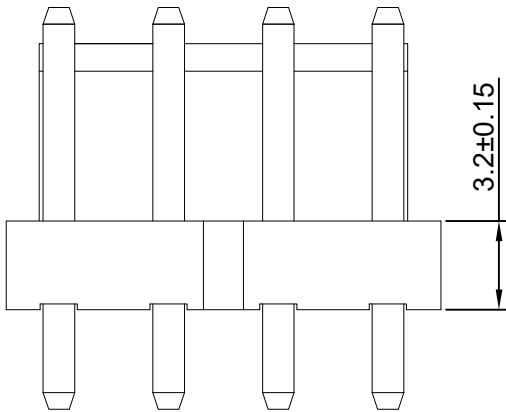

No. of PIN/ROW	Dimension	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	73.56
12	43.56	47.52
13	47.52	51.84
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

PART NO: M3960V-XX		XFCN 兴飞连接器	
TITLE: 3.96mm Crimp Style Connectors		0769-82001899	
		www.xfconn.com	
		DWG NO:	
APPD	Chen ZhiQiang	VIEW	
CHKD	Liu Wei	SCALE	SHEET
DRAW	Chen HongJiang	SCALE	REV
DATE	2024.08.01	NONE	1/1 A1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN