


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

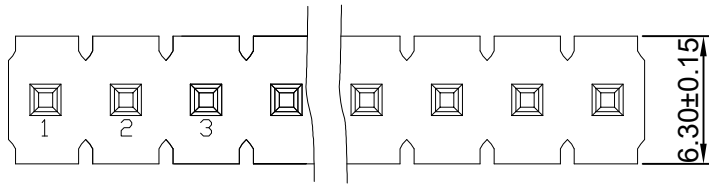

SPECIFICATIONS

- Current rating: 7A
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.



Material:

Insulator Material:LCP+30%G.F (UL 94V-0) Black
 Contact Material:Brass
 Plating:Matte Tin or gold plated over Nickel
 Mate with XFCN PM396 Single row series

Ordering Code:

PZ396V-11-xxP
 1 2

- 1.序列号
- 2.Pin位数: 01-30P

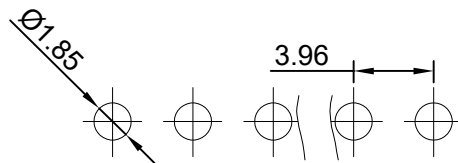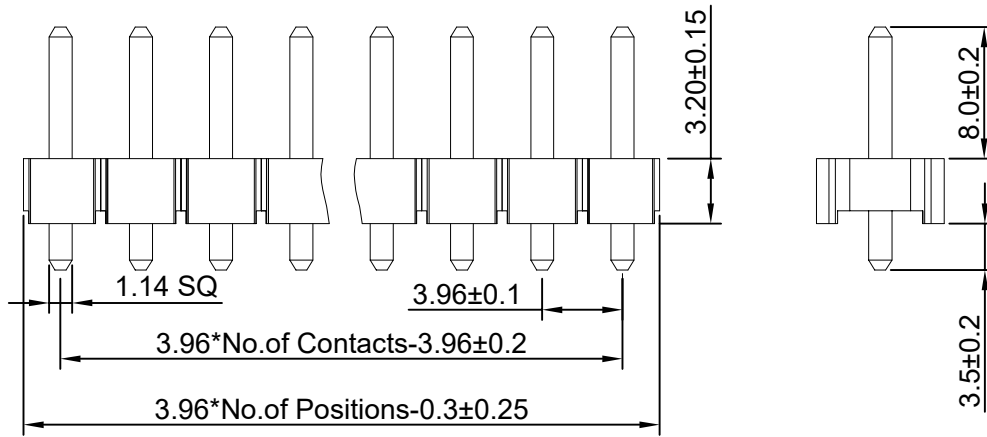

P.C.B Hole Layout

X.±0.50	X.°±	PART NO: PZ396V-11-xxP		XFCN 兴飞连接器	
.X±0.25	.X°±	TITLE: 3.96mm Pin Header Connectors		0769-82001899	
.XX±0.15	.XX°±			www.xfconn.com	
.XXX±0.10	.XXX°±			DWG NO: /	
UNITS: mm	mm	APPD	Chen ZhiQiang	VIEW	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		CHKD	Liu Wei	SCALE	SHEET
		DRAW	Chen HongJiang	SCALE	REV
		DATE	2024.08.10	NONE	1/1