


# RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25



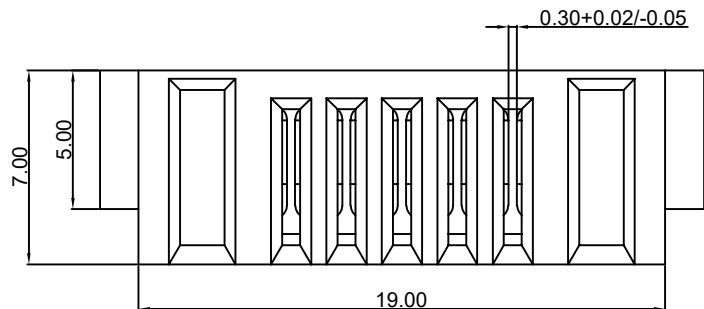


### SPECIFICATIONS


1. Current rating: 7A
2. Temperature range: -40°C ~ +85°C
3. Insulation resistance: 100MΩ Min.
4. Withstanding voltage: 500V AC/ minute.
5. Contact resistance: 30mΩ Max.

### Material:

Insulator Material: PA46 (UL 94V-0)  
 Contact Material: Phosphor Bronze C5191  
 Plating: Nickel Low, gold plated surface  
 Mate with XFCN DCZ05-00F1-3010-A

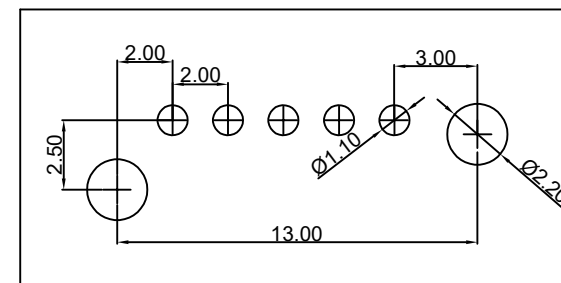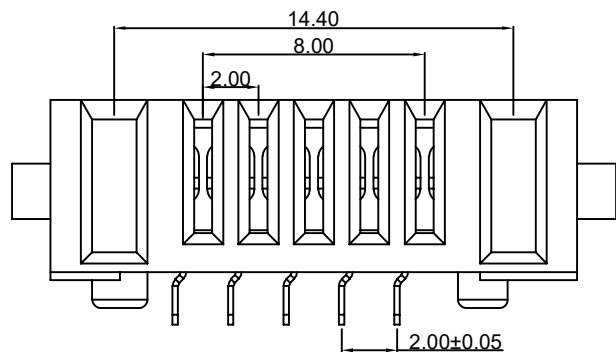

PCB LAYOUT

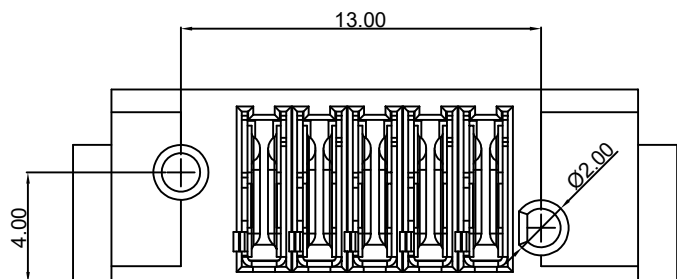

X. 0. 3	X. °±
. X±0. 2	.X°±
. XX±0. 08	.XX°±
. XXX±0. 03	.XXX°±
UNITS:	mm

PART NO: DCZ05-00F1-3100-A

**XFCN** 兴飞连接器

TITLE: 2.0mmStand Battery Block

0769-82001899

www.xfconn.com

DWG NO: /

APPD: Chen ZhiQiang

CHKD: Liu Wei

VIEW:

DRAW: Chen HongJiang

SCALE: SHEET: REV:

DATE: 2024.08.14

NONE: 1/1: A1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN