


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25



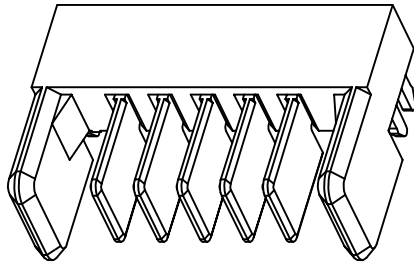


SPECIFICATIONS


1. Current rating: 7A
2. Temperature range: -40°C ~ +85°C
3. Insulation resistance: 100MΩ Min.
4. Withstanding voltage: 500V AC/ minute.
5. Contact resistance: 30mΩ Max.

Material:

Insulator Material: PA46 (UL 94V-0)
 Contact Material: Brass C2680
 Plating: Nickel Low, gold plated surface Mate with

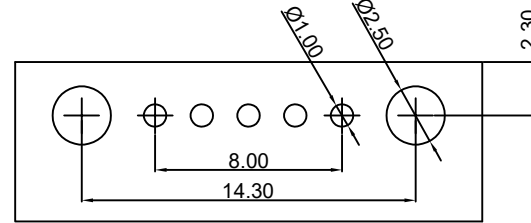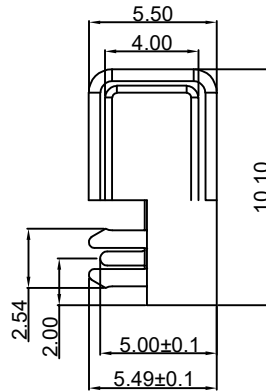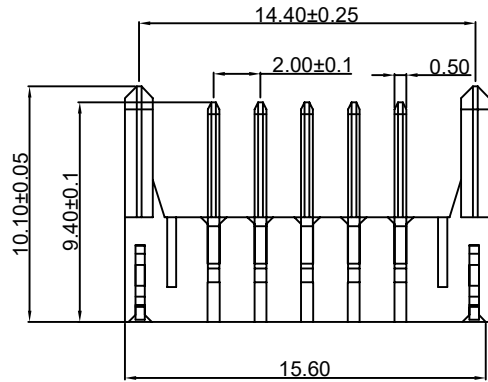

PCB LAYOUT

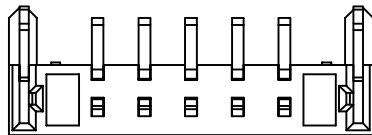

X. 0. 3	X. ° ±	PART NO: DCZ05-N1F1-3000-A	XFCN 兴飞连接器			
. X ± 0. 2	. X ° ±					0769-82001899
. XX ± 0. 08	. XX ° ±					www.xfconn.com
. XXX ± 0. 03	. XXX ° ±					DWG NO: /
UNITS:	mm	APPD	Chen ZhiQiang	VIEW		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		CHKD	Liu Wei	SCALE	SHEET	
		DRAW	Chen HongJiang	SCALE	REV	
		DATE	2024.08.22	NONE	1/1	A1