

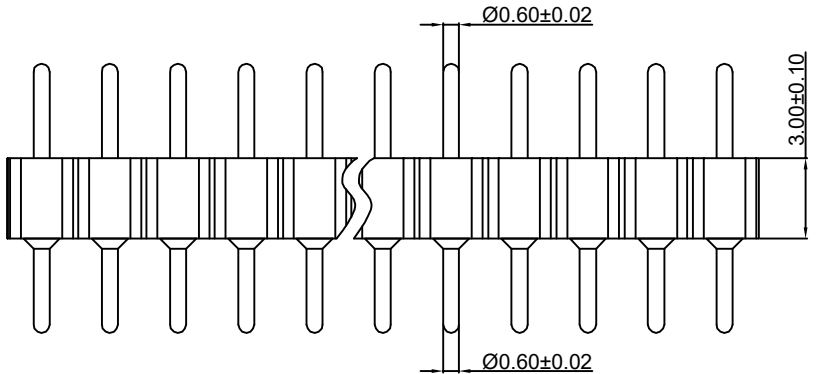


# RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

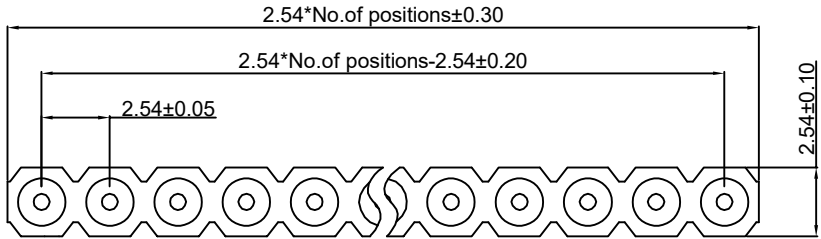

### Technical Data


Material:  
 Contact Material: Copper Alloy  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PPS UL94V-0

Electrical:  
 Rating current: 3Amps/contact max  
 Rating voltage: 60V AC/DC  
 Contact resistance: ≤10MΩ/contact  
 Insulation resistance: ≥1000MΩ  
 withstanding Voltage: 500V AC/minute

Mechanical:  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin Plated: -40°C to +105°C  
 Soldering temperature: +260°C MAX(PPS)

Ordering Code:  
**MH254V-11-XX-1000**  
 1            2

1.序列号  
 2.Pin位数: 02-40P

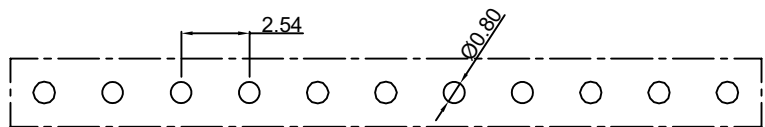

P.C.B LAYOUT

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO: MH254V-11-XX-1000		<b>XFCN</b> 兴飞连接器		
TITLE: 2.54mm Machined Pin Header		0769-82001899		
		www.xfconn.com		
		DWG NO: /		
APPD	Chen ZhiQiang	VIEW		
CHKD	Liu Wei	SCALE	SHEET	REV
DRAW	Chen HongJiang	NONE	1/1	A1
DATE	2024.09.15			