
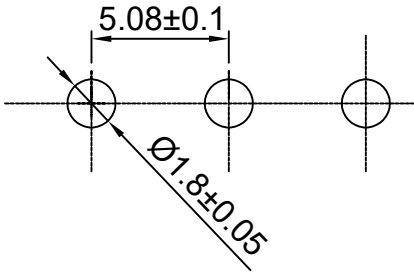


RoHS

REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

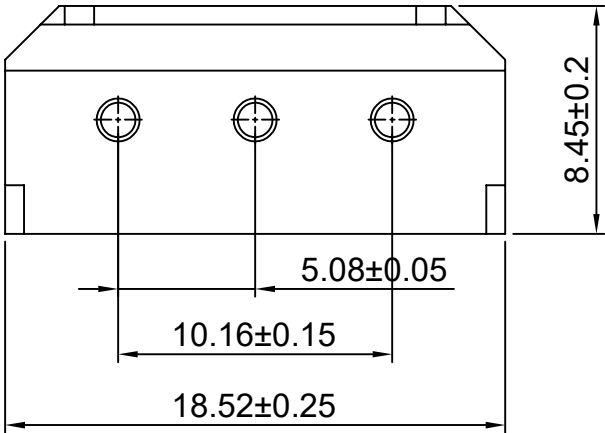

PCB LAYOUT

SPECIFICATIONS

1. Rated current: 10A AC, DC
2. Rating voltage:250V AC DC
3. Temperature range: -25°C ~ +85°C
4. Insulation resistance: 1000MΩ Min.
5. Withstand voltage: 1500V AC/Minute
6. Contact resistance: 10mΩ Max.



Material:

Insulator :Nylon66 UL94V-2
TContact :Brass
Plating:Plated Tin or Plated Gold
Circuits: 2-4P
Mate with P5082 series housing

Ordering Code:

M5082VK-03P
1 2

- 1.序号号
- 2.Pin位数: 02-04P

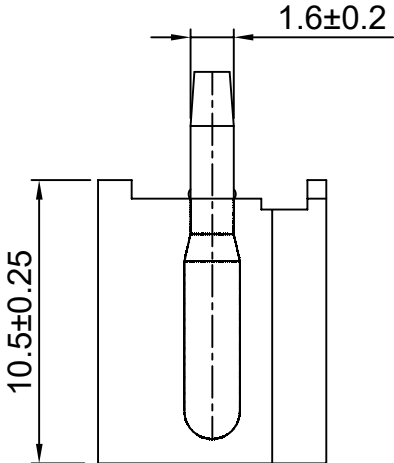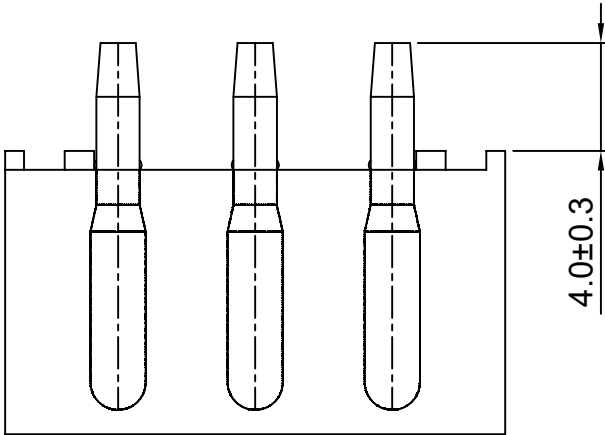

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF XFCN AND SHALL
NOT BE REPRODUCED,COPIED OR CUED IN
ANY MANNER WITHOUT THE PRIOR
WRITTEN CONSENT OF XFCN

PART NO: M5082VK-03P		XFCN 兴飞连接器		
TITLE: 5.08mm Crimp Style Connectors		0769-82001899		
		www.xfconn.com		
		DWG NO: /		
APPD	Chen ZhiQiang	VIEW		
CHKD	Liu Wei	SCALE	SHEET	REV
DRAW	Chen HongJiang	SCALE	SHEET	REV
DATE	2024.07.22	NONE	1/1	A1